

# L4015UVT

Peterbilt 520 Cab



# L4012VT

Freightliner EconicSD™



# L4012MVT


Peterbilt 220/520 Cab



See back for model features.

| Features  | 4012 VT - VK                |
|---|-----------------------------|
| Operating Pressure  | 40,000 PSI                  |
| Flow Rate   | Up to 15 GPM                |
| Vacuum Recovery   | up to 1,400 CFM             |
| Water Supply Tank   | 2,250 gallon   3,250 gallon |
| Simple Vacuum Debris Tank                                 | 2,250 gallon                |
| Production Hours Based on Water Tank Capacity & Flow Rate | 4.5-6.5 hours approx.       |
| Production Hours Based on Vacuum Debris Capacity          | 4.5 hours approx.           |
| Auxiliary Diesel Engine                                   | up to 410hp (Integrated)    |
| Truck Mount Cleaning Head Assembly                        | Yes                         |
| Tractor Mount Cleaning Head Assembly                      | Yes                         |
| Spray Bar Cleaning Widths                                 | 6" to 36" per single bar    |
| Automatic Sweep Function                                  | Up to 72"                   |
| Dry Shutoff Dump Valve for Skip Removal                   | Yes                         |
| System Control  | No computer logic (PLC)     |
| Creep Drive   | Poclain                     |

## JETSTREAM 5240 PUMP

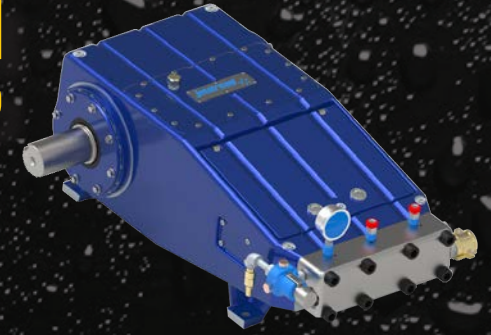

- ✓ Easy to work on
- ✓ 15GPM
- ✓ Made in America

## HAMMELMANN® PUMP



- ✓ Largest pump company in the world
- ✓ Warranty of 24-months or 2,000 operating hours
- ✓ 12GPM



### LIQUIDATOR ADVANTAGES:

SIMPLICITY & EASE OF OPERATION || COMPETITIVELY PRICED  
 LOWEST OPERATING COSTS || BEST RUN TIME IN INDUSTRY  
 QUICKER RETURN ON INVESTMENT